
Lab Photo Reactor Option

- Compatible with the Lab Reactor system
- Tunable LED irradiation source, with 6 different wavelengths
- LED lighting intensity higher than 100 mW/cm²
- Efficient light penetration with both sides of glass fluidic module illuminated
- Extended LED lifetime due to efficient liquid cooling
- Wireless control of wavelength selection and intensity

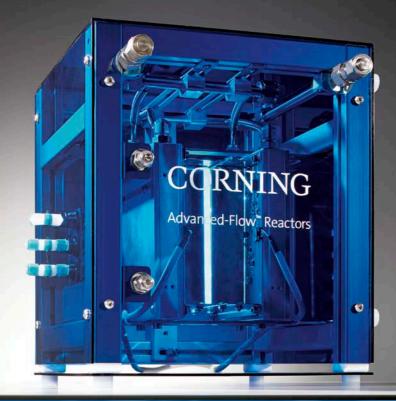

CORNING

EMEA and NSA

Corning S.A.S.
Reactor Technologies
7 bis Avenue de Valvins
CS 70156 Samois sur Seine
77215 Avon Cedex, FRANCE
ph. +33 1 64 69 71 07
fax +33 1 64 69 70 59
reactors@corning.com

CHINA

Corning China (Shanghai) RHQ
No. 358 Lu Qiao Road
Jinqiao Export Processing Zone, Pudong
Shanghai 201206, CHINA
ph. +86 21 22152888 *1408
fax +86 21 621522988
reactor.asia@corning.com

INDIA

Corning Technologies India Pvt. Ltd. 2nd floor, DLF Building 9B DLF Cyber City Phase III Gurgaon, Haryana 122002, INDIA ph. +91 124 4604000 fax +91 124 4604099 reactor.asia@corning.com

CORNING

The future flows through Corning® Advanced-Flow™ Reactors

Lab Reactor


www.corning.com/reactors © 2017 Corning Incorporated. All rights reserved

Lab Reactor

Stepping into flow chemistry

Features

- Plug and play open system including data monitoring
- Ready to start, with thermostat integrated
- Up to 3 liquid lines, 1 gas line and a back pressure regulator for pressure control
- High chemical durability due to a full metal free system
- Outstanding mixing and heat exchange with patented HEART design
- Low internal volume
- Seamless scale-up with other Advanced-Flow™ Reactor products



Fluidic module size: 155 x 125 mm





Size: 45 x 48 x 52 cm (L x W x H) Size: 40 x 38 x 45 cm (L x W x H)

Technical Specifications

FLOW RATE	TEMPERATURE	PRESSURE	MATERIALS	FLUIDIC MODULE	OPTIONS
2 to 10 ml/min	-40°C to 200°C	Up to 18 barg	Glass PFA / PTFE Perfluoroelastomer	2.7 ml internal volume	3 rd liquid dosing line 2 nd glass fluidic module Lab Photo Reactor module